



























ISO 9001:2000






















































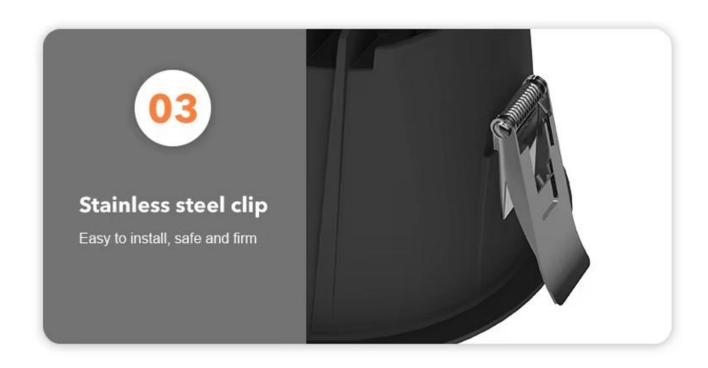


























Highlight chips are preferred



Quality Assurance



High CRI



No stroboscopic



High quality Aluminum







ISO 9001:2000












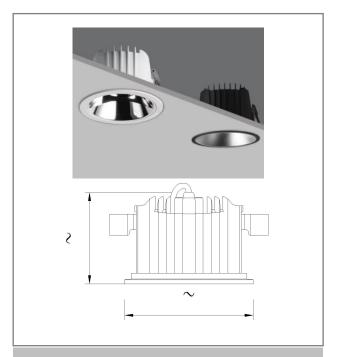

Description:

Deep anti-glare embedded downlight UGR antiglare value < 19 Surface treatment: sand white, anti-glare cover Color: black, white, material/process: aluminum/ADC12/integrated die-casting, reflective cup beam of light Angle: 45 ° Adapted light source bracket: Cree 1304, 1507 Citizen 020/1830/2520 Citizen 030

SPECIFICATIONS

Lamp model	2501P	3001P	4001P	5001P	6001P	8001P
Diameter	85MM	105MM	131MM	150MM	191MM	215MM
Opening	75MM	95MM	115MM	135MM	175MM	200MM
Height	54MM	65MM	75MM	80MM	95MM	105MM
Power	12W	18W	20-30W	30-38W	40-50W	50-60W
Luminous surface	11MM	11MM	11MM/14 MM	16MM/17M M/21MM	16MM/17M M/21MM	16MM/17M M/21MM
Beam angle of light	15° /24° /38° /60°					















