






ISO 9001:2000







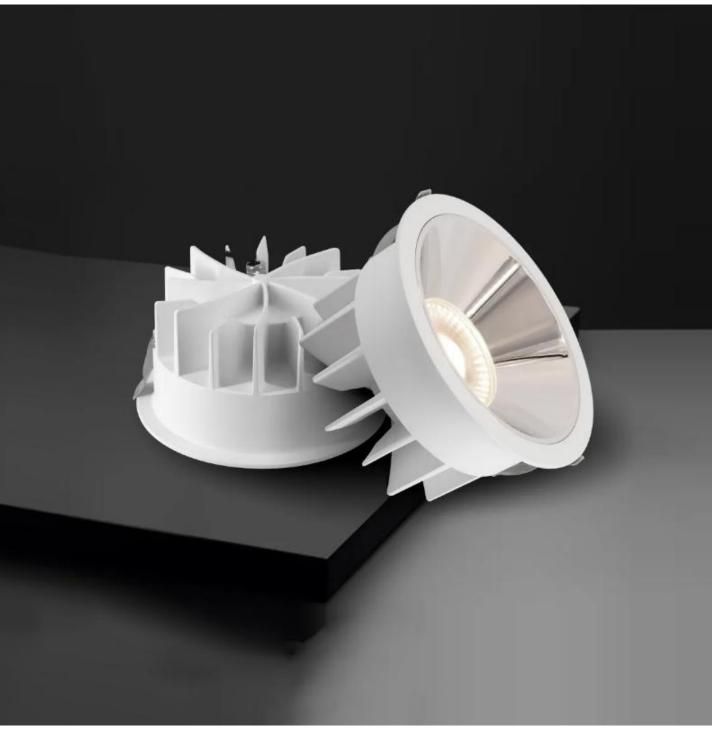





RoH

ISO 9001:2000









(E COUS LISTED FC CCC

RoH

ISO 9001:2000
























Unique design Die-cast aluminum housing for improved heat dissipation





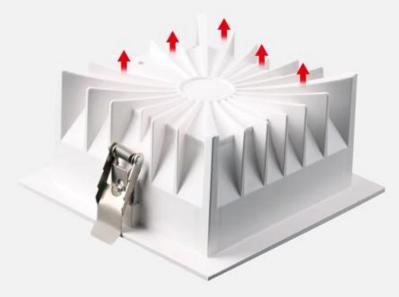

Special designed for efficient heat dissipation





Installation View

Five colors of reflector optional





















FCS-E, F series downlight

Description:

Deep anti-glare recessed downlight

UGR anti-glare value < 19

Surface treatment: sand white

Material/process: aluminum/integrated die-casting

Voltage: ADC12

Anti-glare cover color: black gold, bright silver

Beam angle: 60°

Compatible light source brackets: 1507/1816/1830/2520/030/020/030

SPECIFICATIONS

Lamp model	3001E/F	4001E/F	5001E/F	6001E/F	8001E/F
Diamete/l ength * width	115/115*115M M	140/140*140M M	160/160*160M M	198/195*195M M	230MM
opening	100/100*100M M	125/125*125M M	145/145*145M M	180/180*180M M	215MM
Height	65MM	80/75MM	85/80MM	98/95MM	102MM
Power	10W	20W	30W	40W	50W
Luminous surface	11mm	11/14/16/17mm	11/14/16/17mm	11/14/16/17mm	14/16/17mm
Beam angle of light	60°				

RoHS







