























































































































MULTIPLE INSTALLATION MODES

Light up every place that needs us



Ceiling mounted



Suspension mounted




















PRODUCT ANALYSIS

Best Selling Surface Mounted Downlight

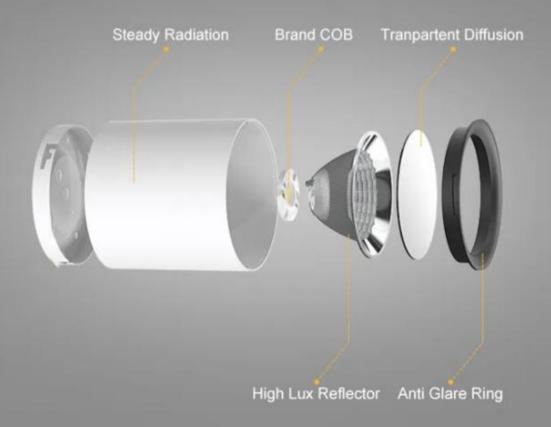



















FCS-New K series surface mounted downlights

Description:

Exposed downlight with UGR anti-glare value < 19.

Surface treatment: sand white, sand black.

Material/process: aluminum/integrated die-casting.

Voltage: ADC12.

Beam angle: 20° / 40° / 60° .

Compatible light source brackets: 020, 1507, 1304, 1816, 1830, 2520.

SPECIFICATIONS

Lamp model	2501K/2501 K-1	3001K/3001K -1	4001K/4001K -1	5001K	6001K	8001K
Diamete r/Lengt h*Width	72/72*72M M	90/90*90MM	110/111*111 MM	130MM	170MM	195MM
Height	75MM	90MM	110MM	130MM	170MM	190MM
Power	10/12W	15/20W	25/30W	30W	40W	50W
Lumino us surface	11mm	11mm	11/14mm	11/14mm	17/22mm	17/22mm
Beam angle of light	20° /40° /60°					















