



Deep anti-dazzle

Deep-hidden reflective cup, $UGR < 16$, lengthen the distance between the light source and the light outlet, improve the anti-glare performance the light passes through the filtering of the reflective cup and anti-glare honey-comb, effectively reducing redundant light beam




ISO 9001:2000



Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427

Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai
UAE

FOCUSLITE[®]

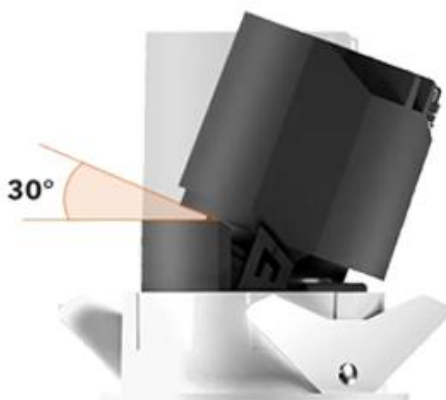

ISO 9001:2000



Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427

Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai
UAE

FOCUSLITE®




ISO 9001:2000



Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427

Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai
UAE

FOCUSLITE®

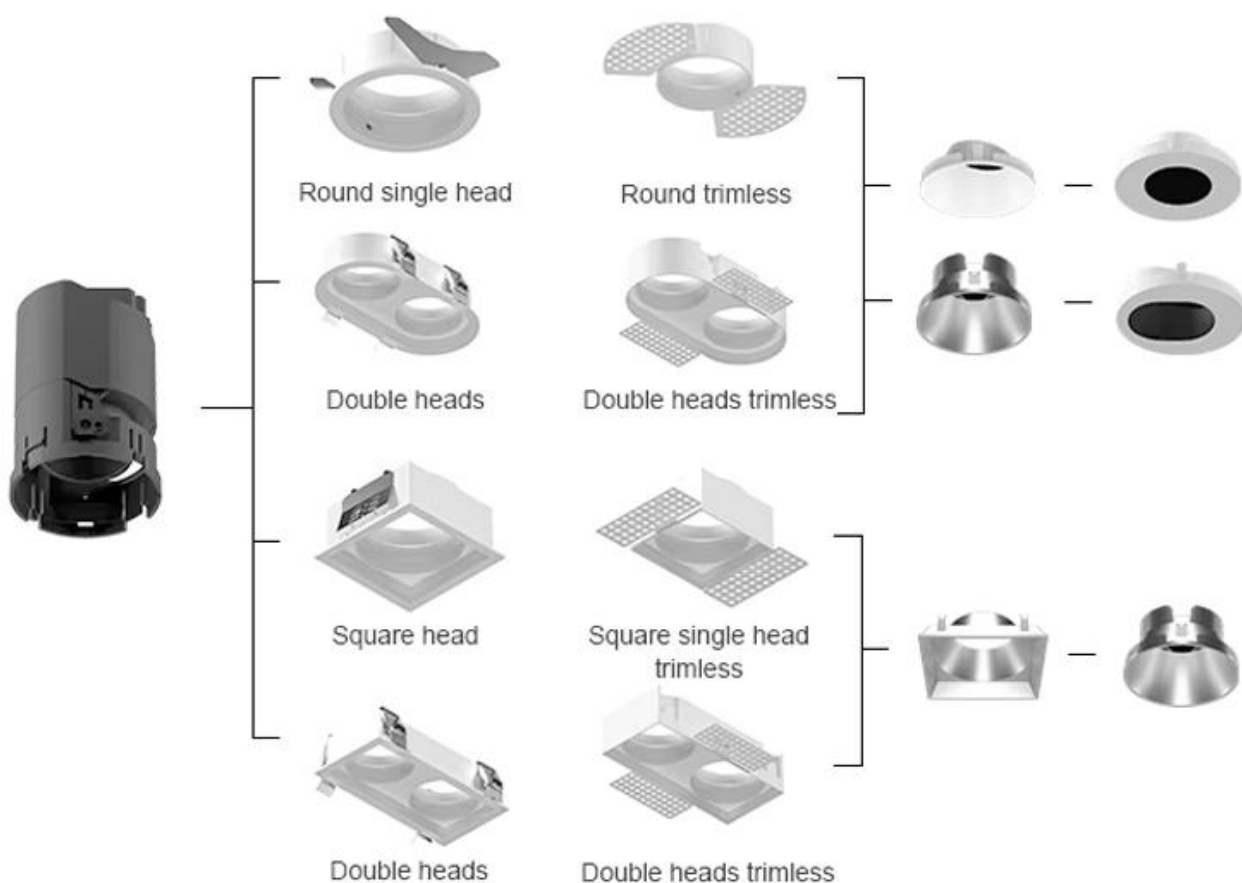

ISO 9001:2000



Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427

Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai
UAE

FOCUSLITE[®]

CRI

High color rendering



Stable heat dissipation



Aesthetic design



Easy installation



Multiple color temperatures



Energy saving



ISO 9001:2000



Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427

Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai
UAE

FOCUSLITE®



ISO 9001:2000



Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427

Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai
UAE

FOCUSLITE®




ISO 9001:2000



Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427

Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai
UAE

FOCUSLITE®

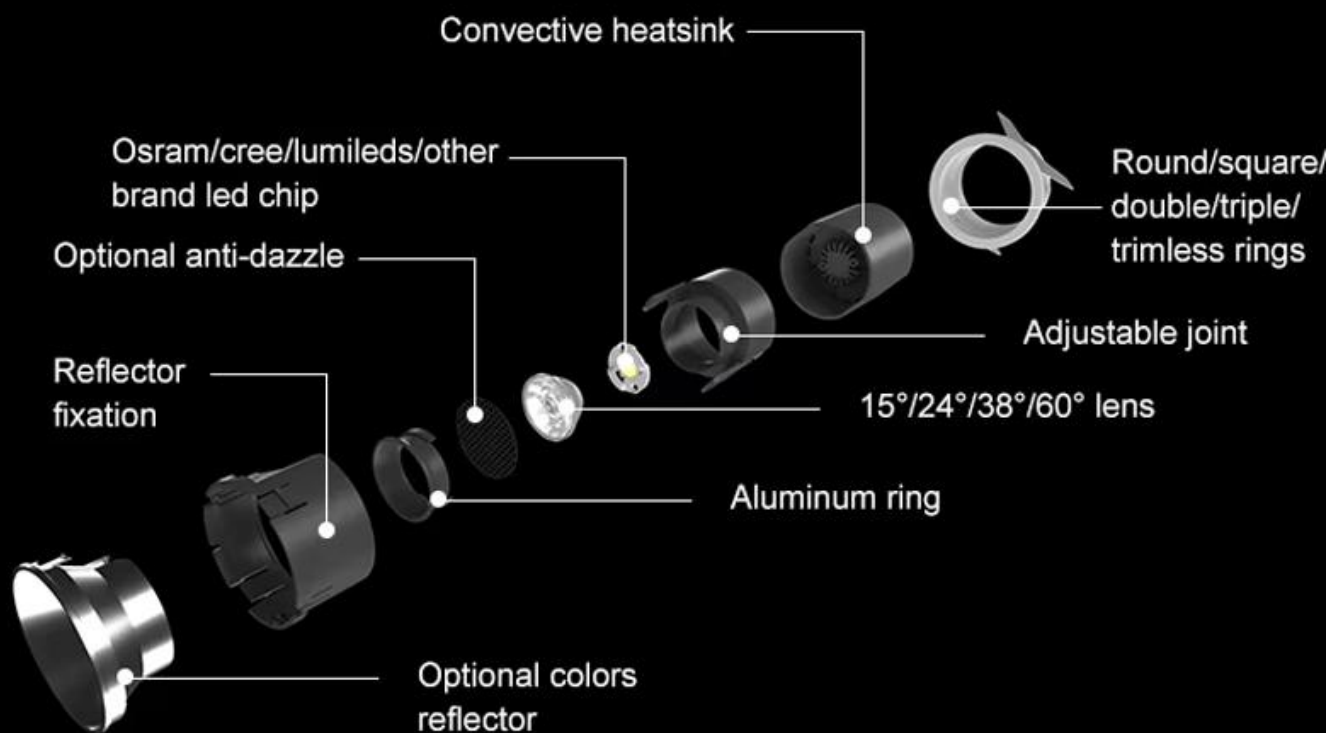


ISO 9001:2000




Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427

Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai
UAE


FOCUSLITE®

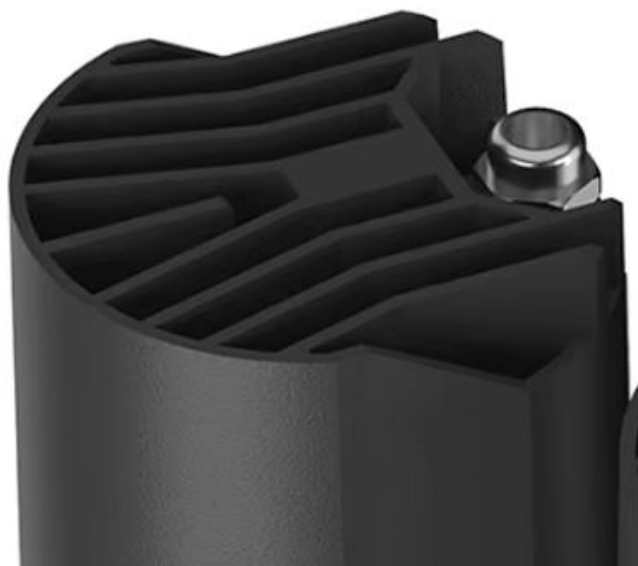


Aluminum housing turbo radiator

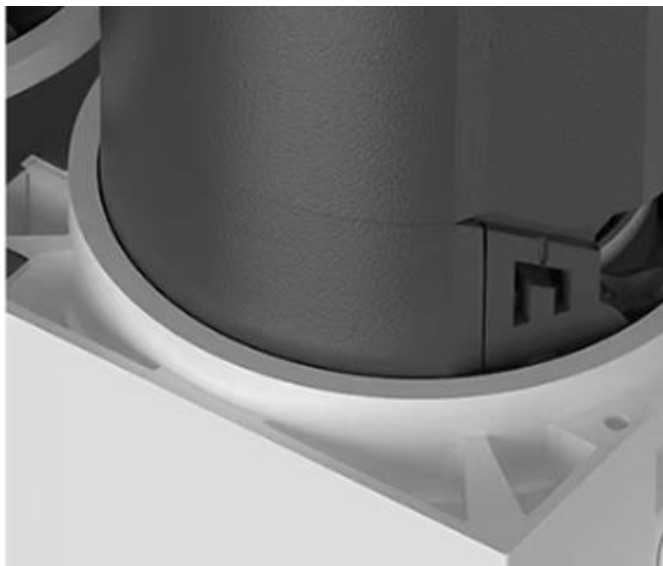

No screw design, Easy installation and easy remove

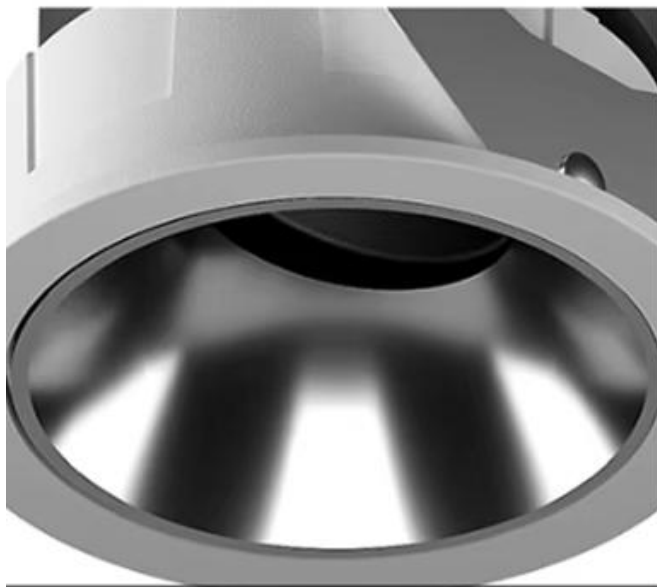

Soft lighting effect, Anti-glare design

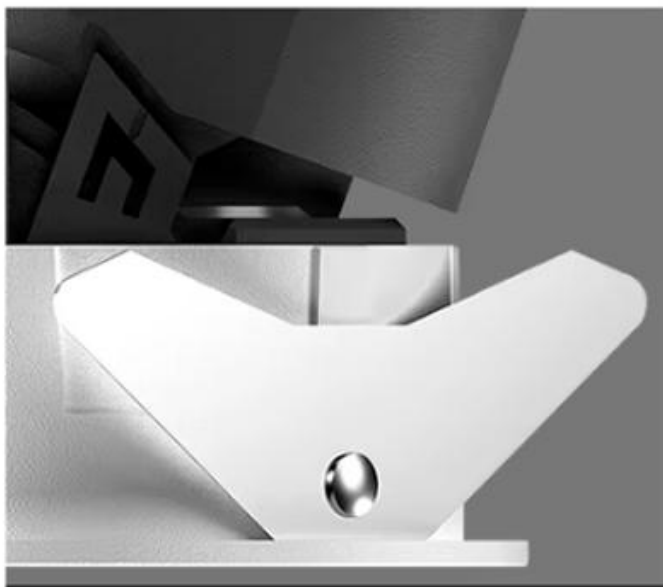

Stainless steel buckle, safe and firm



ISO 9001:2000



Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427

Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai
UAE

FOCUSLITE®



ISO 9001:2000



Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427

Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai
UAE



Fantix waterproof wall washer downlight series

Description:
Embedded IP65 spotlight (355 ° universal adjustment) UGR < 16 Surface treatment: face ring two-color or sand white, radiator oil injection/gray, process: full die-casting, marble type, reflector: gun black/bright silver/matte black/sub-white/sand silver/gold, suitable light source bracket: 1304 anti-glare accessories: honeycomb network

SPECIFICATIONS

Lamp model	WF323A\WF323B\T-WF323A\T-WF323B\C-WF323A\C-WF323B	WG323A\WG323B\T-WG323A\T-WG323B\C-WG323A\C-WG323B
with or without border	Yes/No	Yes/No
Diameter/Opening	55/62/64/57/108/116/117/126/130/140/162/171mm	55/62/64/57/108/116/117/126/130/140/162/171mm
Height	70/75/78mm	85/90/93mm
Power	7/2*7/3*7/4*7w	10/2*10/3*10/4*10w
Luminous surface	8mm	8mm
Beam angle of light	15° /24° /38° /60°	



ISO 9001:2000



Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427
Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai UAE

Fantix waterproof wall washer downlight series

Description:
Embedded IP65 spotlight (355 ° universal adjustment) UGR < 16 Surface treatment: face ring two-color or sand white, radiator oil injection/gray, process: full die-casting, marble type, reflector: oval hole, round hole, gun black/bright silver/matte black/sub-white/sand silver/gold, lens light source bracket: 1304, 1507, 020, cxm-6 anti-glare accessories: honeycomb network

SPECIFICATIONS

Lamp model	WF324A\WF324B\WF324C\WF324D\T-WF324A\T-WF324B\T-WF324C\T-WF324D\C-WF324A\C-WF324B\C-WF324C\C-WF324D	WG324A\WG324B\WG324C\WG324D\T-WG324A\T-WG324B\T-WG324C\T-WG324D\C-WG324A\C-WG324B\C-WG324C\C-WG324D
with or without border	Yes/No	Yes/No
Diameter	84/85*85/147*74/147*147/158*84/158*158/163*74/177*87/180*91/187*94/194*104/198*105/221*74/232*85	84/85*85/147*74/147*147/158*84/158*158/163*74/177*87/180*91/194*104/221*74/232*85/281*94
Opening	75/75*75/77*77/148*75/150*150/152*77/152*152/164*77/165*77/178*88/180*90/190*95/192*94/222*75/225*77	75/75*75/77*77/148*75/150*150/152*77/152*152/164*77/165*77/178*88/180*90/222*75/285*97
Height	80/91/146	110/121/126
Power	12/2*12/3*12/4*12/2*30	20/2*20/3*20/4*20
Luminous surface	8/11mm	11mm
Beam angle of light	15° /24° /38° /60°	



ISO 9001:2000





Fantix waterproof wall washer downlight series

Description:
Embedded IP65 spotlight (355 ° universal adjustment) UGR < 16 Surface treatment: surface ring sand white, radiator oil injection/gray, process: full die casting, marble type, reflector: gun black/bright silver/matte black/sub-white/sand silver/gold, suitable light source bracket: 1304, 1507, 020, anti-glare accessories: honeycomb net

SPECIFICATIONS

Lamp model	WF325A\WF325B\T-WF325A\T-WF325B\C-WF325A\C-WF325B	WG325A\WG325B\T-WG325A\T-WG325B\C-WG325A\C-WG325B
with or without border	Yes/No	Yes/No
Diameter	105/105*105/187*94/187*187/198*105/198*198/207*93/222*108/224*110/239*125/281*94/292*105	105/105*105/187*94/187*187/198*105/198*198/207*93/222*108/224*110/239*125/281*94/292*105
Opening	95/95*95/97*97/190*190/192*97/192*192/207*95/209*97/223*109/225*111/284*95/285*97	95/95*95/97*97/190*190/192*97/192*192/207*95/209*97/223*109/225*111/284*95/285*97
Height	110/122/126	130/142/146
Power	20/2*20/3*20/4*20	30/2*30/3*30/4*30
Luminous surface	11mm	11mm
Beam angle of light	15° /24° /38° /60°	



Company address: No.91 ,Nantou Ave. Dong, Nantou town,Zhongshan City, China 528427
Company address: Show room address : No. S-11,Y23 building ,England cluster,International city,50819 Dubai UAE

W series waterproof spotlight

Description:
Embedded IP54 spotlight (355 ° universal adjustment) UGR < 16 Surface treatment: surface ring sand white, radiator oil injection/gray, process: die casting, reflector: gun black/mirror/matte black/matte white, suitable light source bracket: 1830, 030, 2520, anti-glare accessories: honeycomb network

SPECIFICATIONS

Lamp model	W326\W326-1	W327\W327-1
with or without border	Yes/No	Yes/No
Diameter	140/144*144/148	166/169*169/176
Opening	125/125*125	150/150*150/176
Height	155/171	175//176/191
Power	45	60
Luminous surface	16/17/21mm	17/21mm
Beam angle of light	15° /24° /36° /55°	



Fantix wall washer downlight series

Description:

Embedded spotlight (355 ° universal adjustment) UGR < 16 Surface treatment: surface ring sand white, radiator oil injection/gray, material/process: die-cast aluminum/ADC12/reflector: oval hole, round hole, gun black/mirror/matte black/white/sand silver/gold, lens light source bracket: 1304, 1507, 020, cxm-6 lamp cup light source bracket: 1304, cxm-7 anti-glare Accessories: frosted filter, single-biased filter, double-biased filter, elliptical filter, honeycomb net, Note: 8 ° beam of light angle needs special customization

SPECIFICATIONS

Lamp model	W323A\W323B\T-W323A\T-W323B\C-W323A\C-W323B\W323-(1、2、3、4) (A、B、C)	W324A\W324B\W324C\W324D\T-W324A\T-W324B\T-W324C\T-W324D\C-W324A\C-W324B\C-W324C\C-W324D\W324-(1、2、3、4) (A、B、C)	W325A\W325B\T-W325A\T-W325B\C-W325A\C-W325B\W325-(1、2、3、4) (A、B、C)
with or without border	Yes/No		
Diameter	61.6/63.5*63.5/117.5*63.5/117.5*117.5/118*60/128.5*67.5/139.5*78.5/171*63.5	84/84.5*84.5/158*84.5/158*158/180*90.5/193.8*104.3/231.5*84.5	105/104.5*104.5/198*104.5/1998*198/223.5*109.5/238.5*124.5/293.5*104.5
Opening	55/55*55/57.5*57.5/84.15/111*111/108.5*55/108.5*108.5/111*57.5/126.65/163.55/165*57.5	75/75*75/77*77/150*75/150*150/152.5*77/152.5*152.5/164*77/166.5*79.5/177.5*88/180*90.5/222.75/224.5*77	95/95*95/97*97/198*104.5/190*190/192*192/192.5*97//207*95/209*97/223*109/225*111/284*95/287*97
Height	79.1/87.5	100.5/111.75	121.5/133.5/137.5
Power	7/2*7/3*7/4*7	12/2*12	20/2*20/3*20/4*20
Luminous surface	8	8/11	11
Beam angle of light	8° /15° /24° /38° /60°		



ISO 9001:2000

